


2 TRANSPARENT DOORS																						
ITEM CODE	NOMINAL DIMENSIONS			ACTUAL DIMENSIONS			TRANSPARENT DOOR PANEL				USABLE DIMENSIONS OF FRONTAL ENTRY		MOUNTING PLATE		USABLE DIMENSIONS FOR DOOR CUTOUTS			USABLE DIMENSIONS FOR SIDE PANEL CUTOUTS		USABLE DIMENSIONS FOR CABLE ENTRY		FROM FRONTAL INSERTION PLATE TO DOOR
	W	H	D	W	H	D	WV	WW1	WW2	HV	W1	H1	W2	H2	W3	W4	H3	H5	D5	W6	D6	D7
UNIT	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch
SLS12018040_SM_N	1200 / 47.24	1800 / 70.87	400 / 15.748	1210 / 47.64	1827 / 71.93	403 / 15.866	-	400 / 15.748	370 / 14.567	1560 / 61.42	1109 / 43.66	1700 / 66.93	1105 / 43.5	1700 / 66.93	440 / 17.323	410 / 16.142	1600 / 62.99	1685 / 66.34	290 / 11.417	366 / 14.41	210 / 8.268	307 / 12.087
SLS12018050_SM_N	1200 / 47.24	1800 / 70.87	500 / 19.685	1210 / 47.64	1827 / 71.93	503 / 19.803	-	400 / 15.748	370 / 14.567	1560 / 61.42	1109 / 43.66	1700 / 66.93	1105 / 43.5	1700 / 66.93	440 / 17.323	410 / 16.142	1600 / 62.99	1685 / 66.34	390 / 15.354	366 / 14.41	310 / 12.205	407 / 16.024
SIS12020050_SM_N	1200 / 47.24	2000 / 78.74	500 / 19.685	1210 / 47.64	2027 / 79.8	503 / 19.803	-	400 / 15.748	370 / 14.567	1760 / 69.29	1109 / 43.66	1900 / 74.8	1105 / 43.5	1900 / 74.8	440 / 17.323	410 / 16.142	1800 / 70.87	1885 / 74.21	390 / 15.354	366 / 14.41	310 / 12.205	407 / 16.024
VERSION WITH CENTRAL PILLAR																						
SLS16018040_N	1600 / 62.99	1800 / 70.87	400 / 15.748	1610 / 63.39	1827 / 71.93	403 / 15.866	600 / 23.62	-	-	1560 / 61.42	1509 / 59.41	1700 / 66.93	1507* / 59.33*	1700 / 66.93	640 / 25.197	-	1600 / 62.99	1685 / 66.34	290 / 11.417	566 / 22.283	210 / 8.268	307 / 12.087
SLS16018050_N	1600 / 62.99	1800 / 70.87	500 / 19.685	1610 / 63.39	1827 / 71.93	503 / 19.803	600 / 23.62	-	-	1560 / 61.42	1509 / 59.41	1700 / 66.93	1507* / 59.33*	1700 / 66.93	640 / 25.197	-	1600 / 62.99	1685 / 66.34	390 / 15.354	566 / 22.283	310 / 12.205	407 / 16.024
SLS16020050_N	1600 / 62.99	2000 / 78.74	500 / 19.685	1610 / 63.39	2027 / 79.8	503 / 19.803	600 / 23.62	-	-	1760 / 69.29	1509 / 59.41	1900 / 74.8	1507* / 59.33*	1900 / 74.8	640 / 25.197	-	1800 / 70.87	1885 / 74.21	390 / 15.354	566 / 22.283	310 / 12.205	407 / 16.024

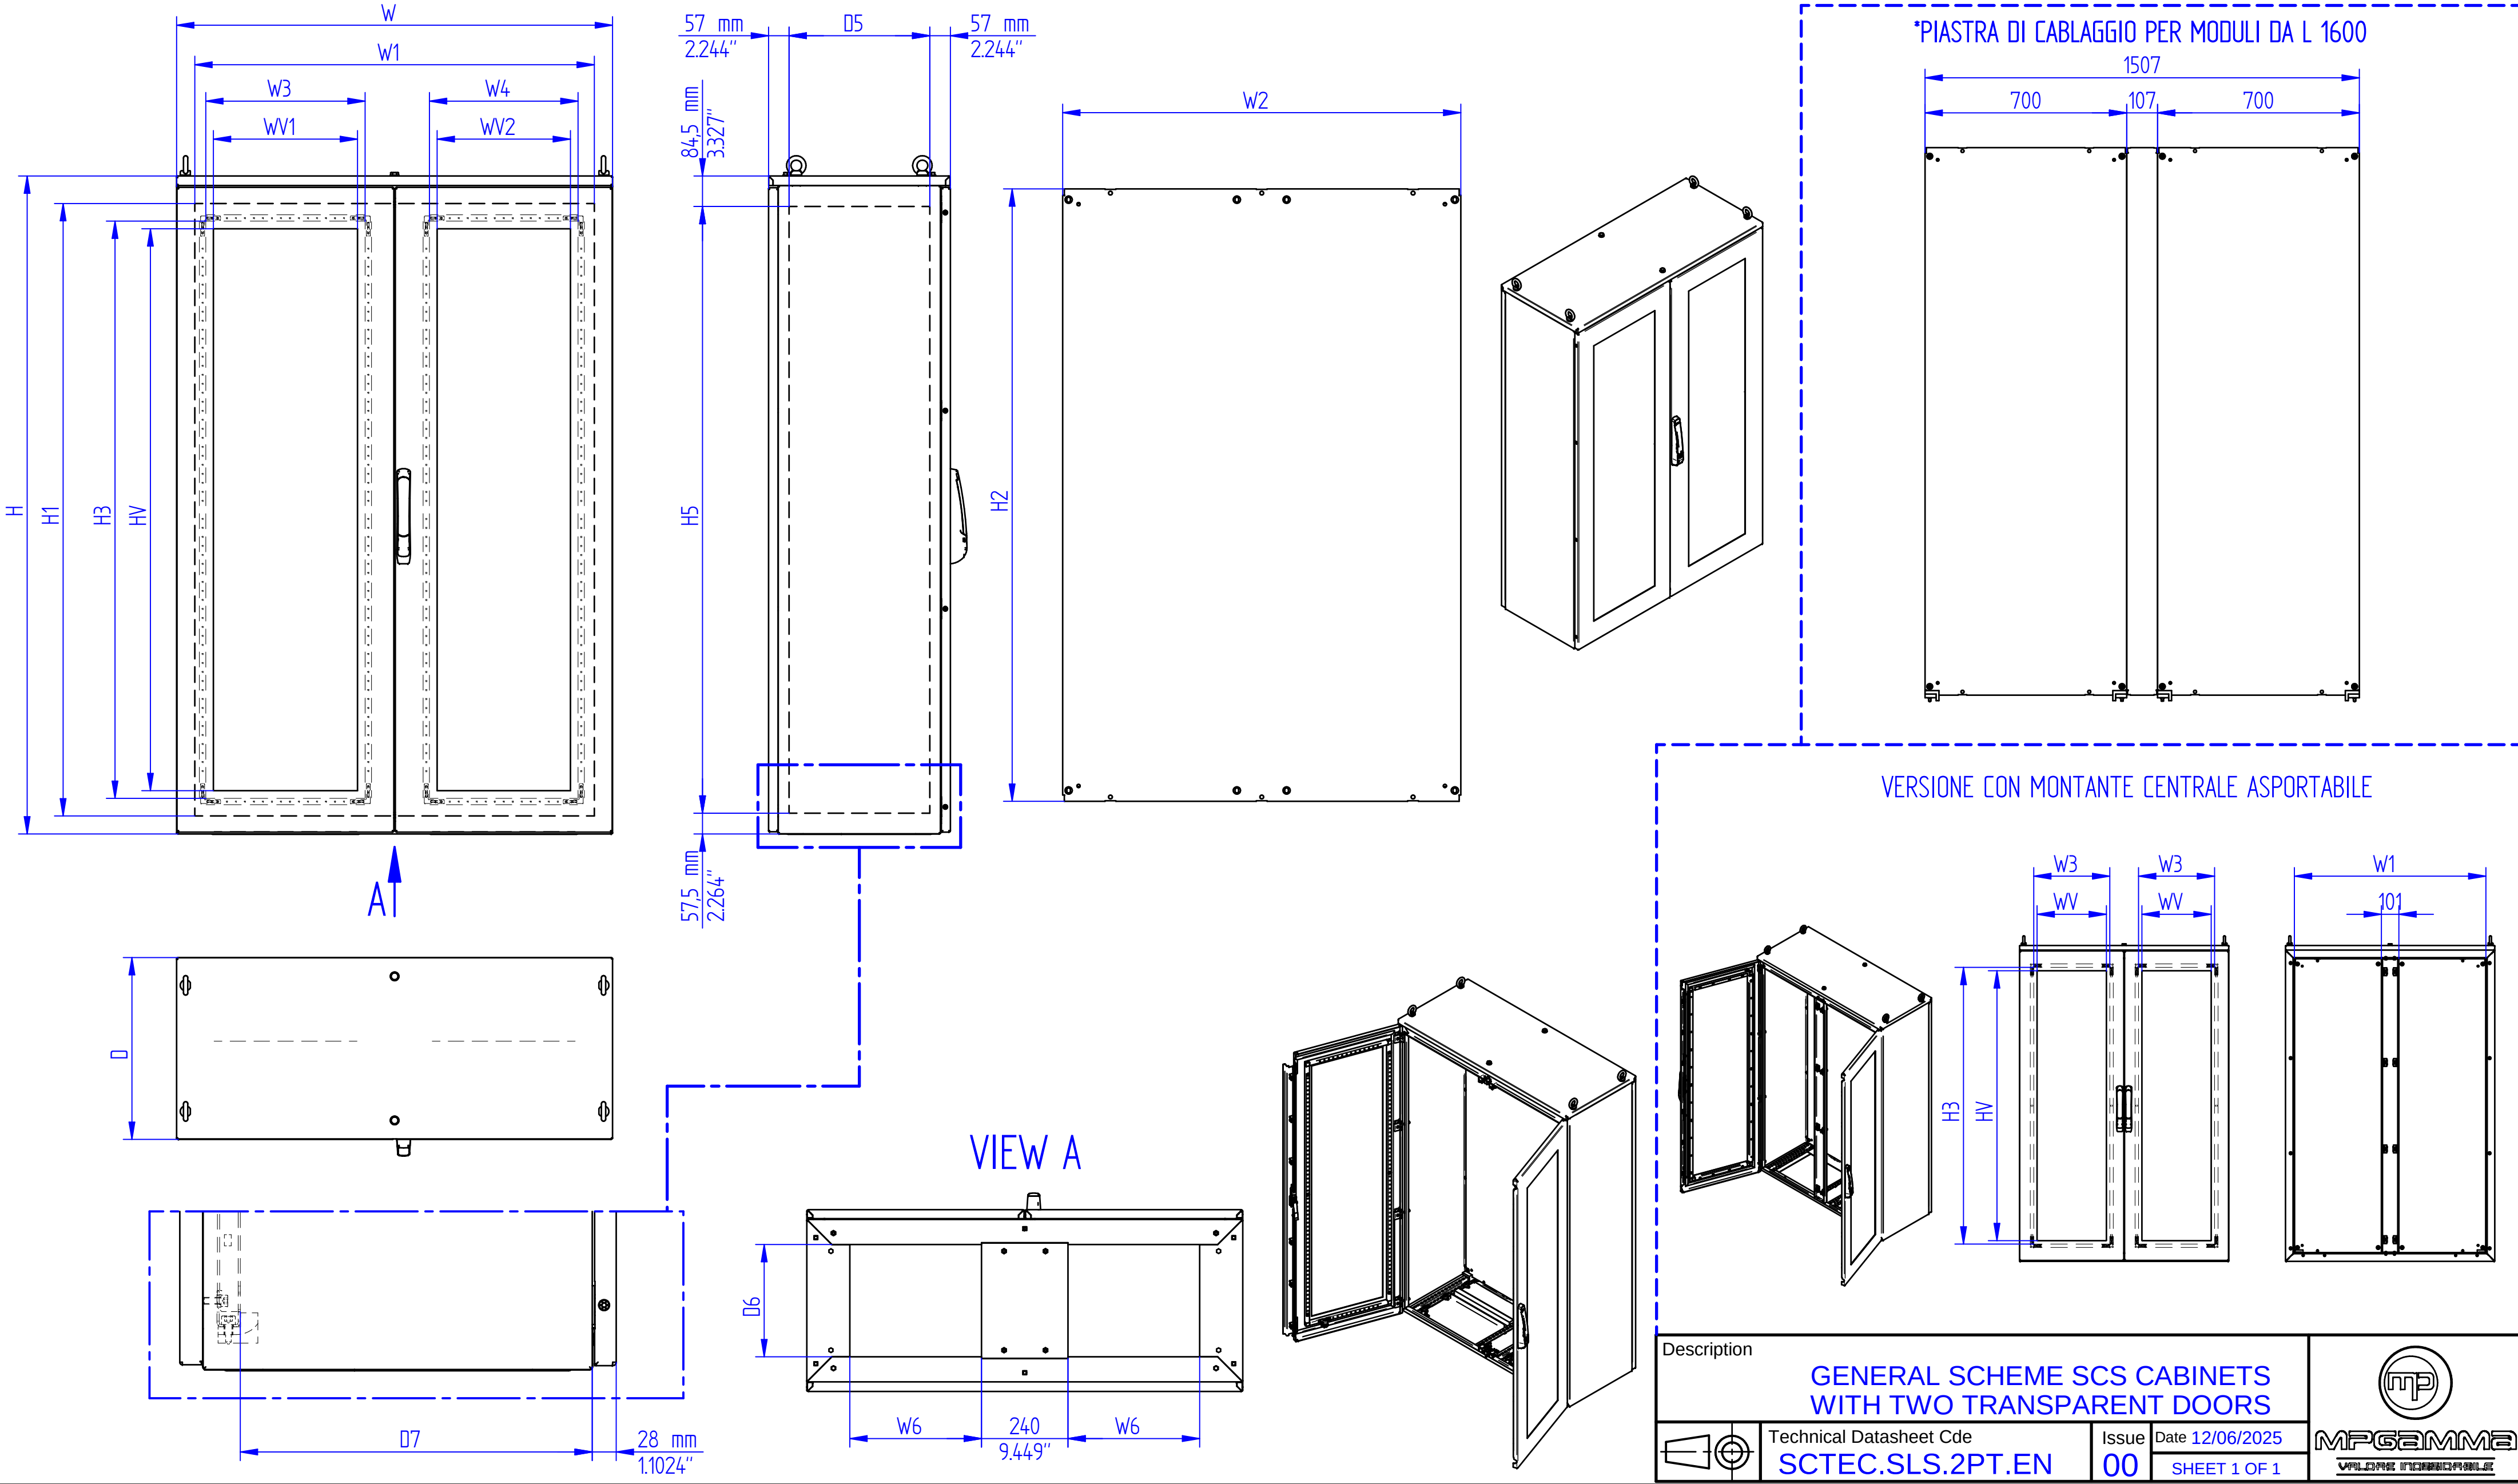

MEDIUM-GRADE TOLERANCES AS PER STANDARD : ISO2768-m