
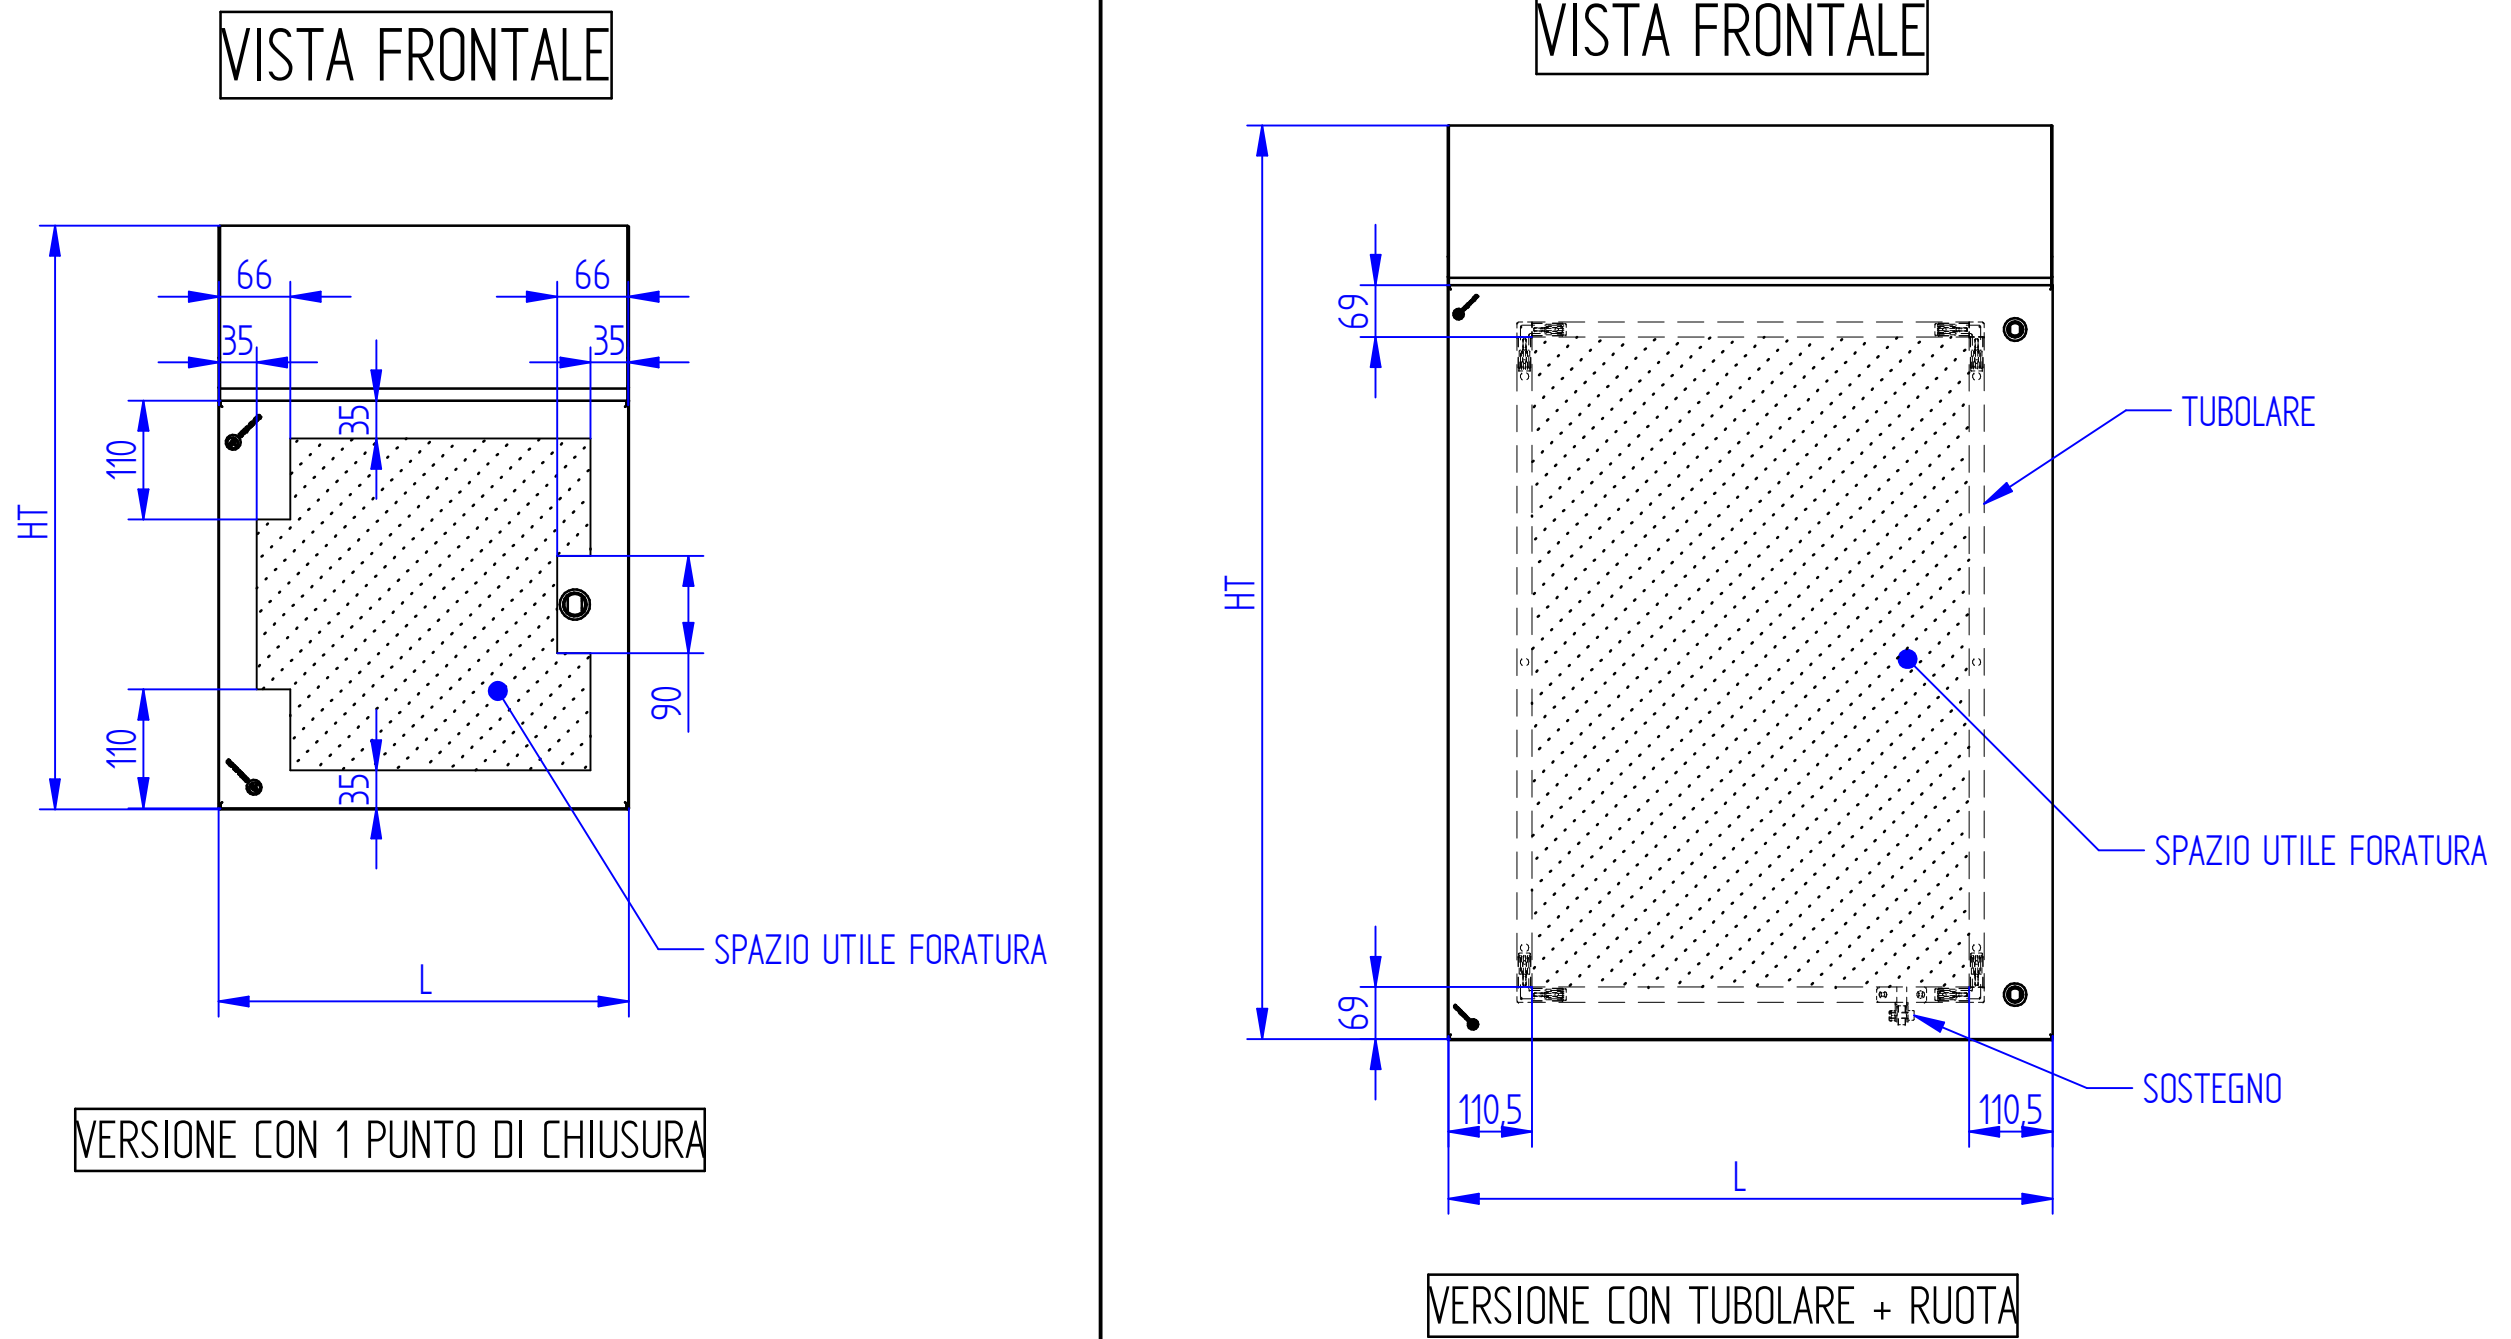
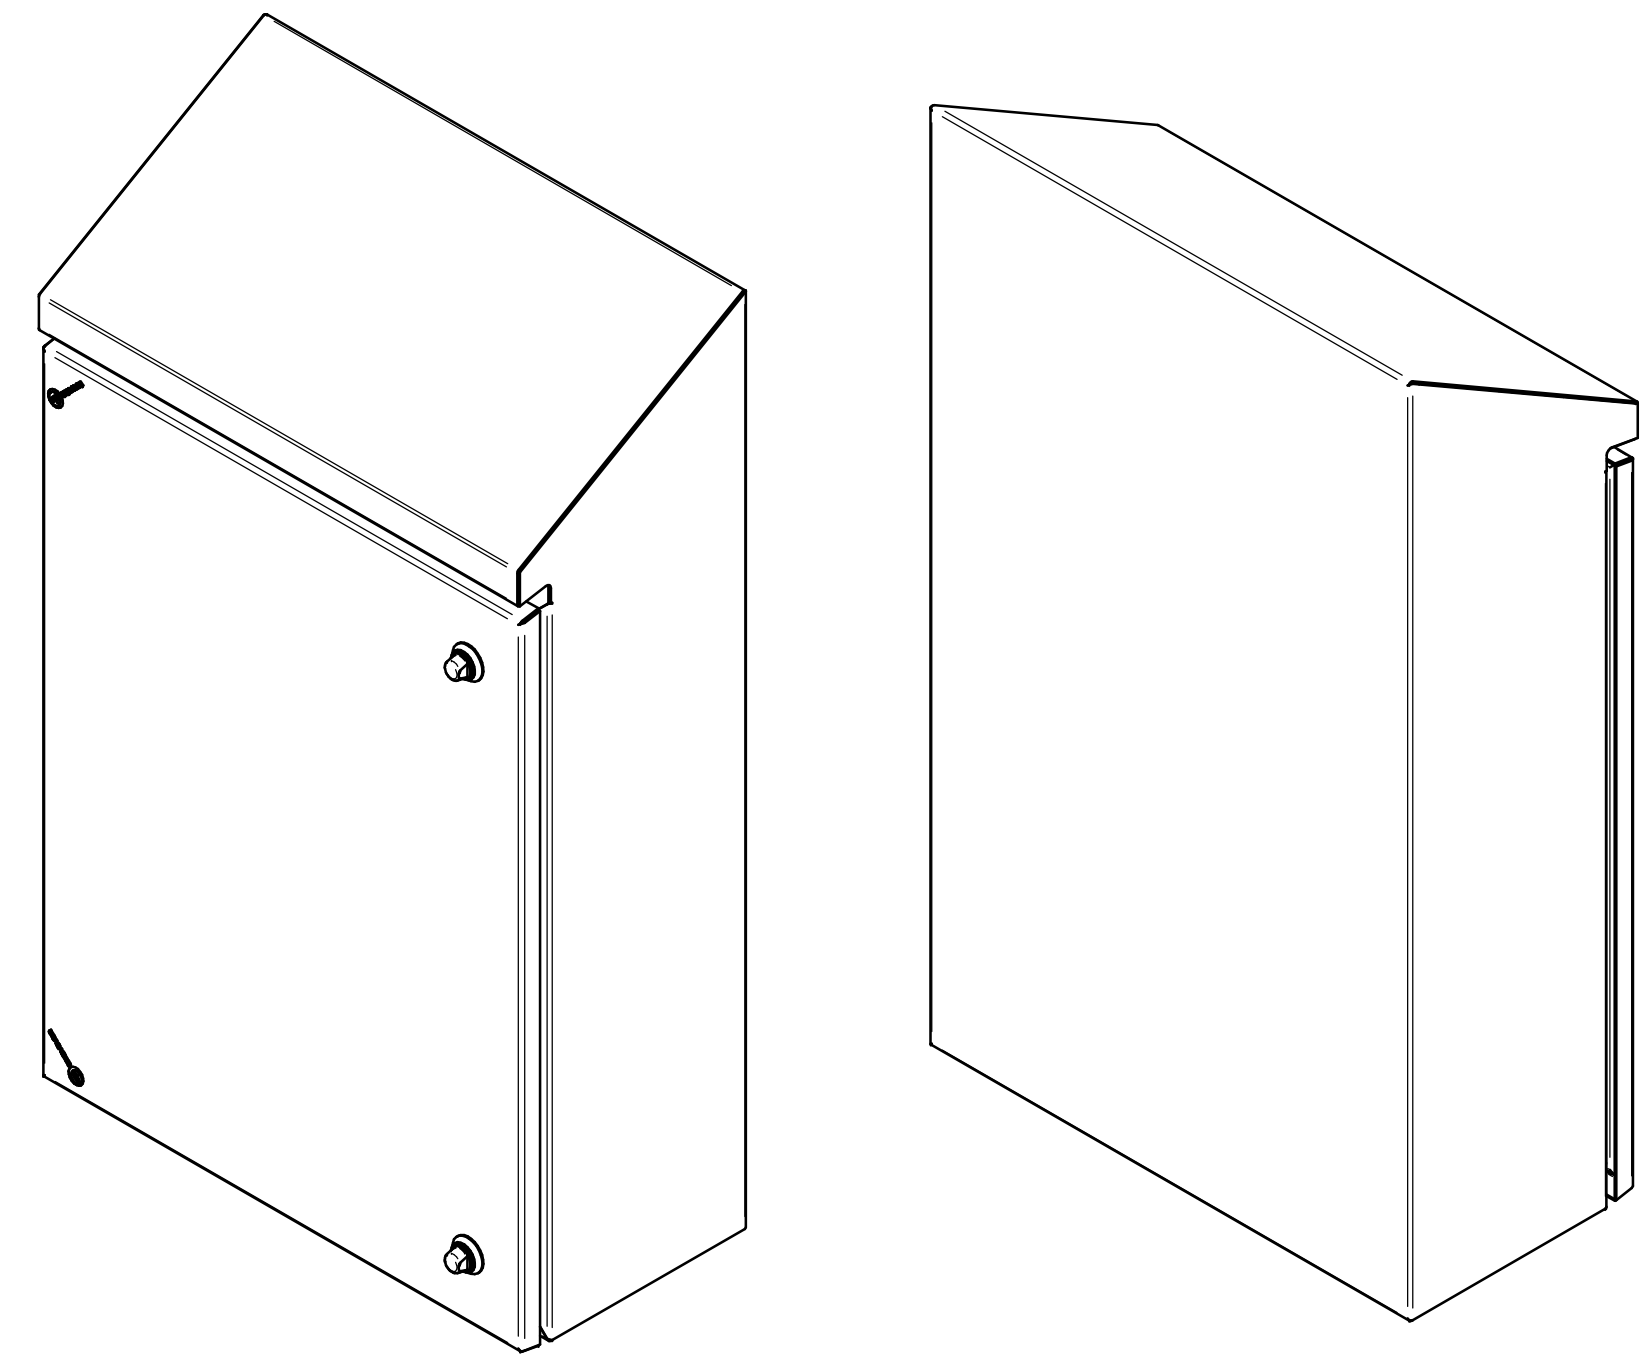


TOLLERANZE IN GRADO MEDIO COME DA NORMA: ISO2768-m

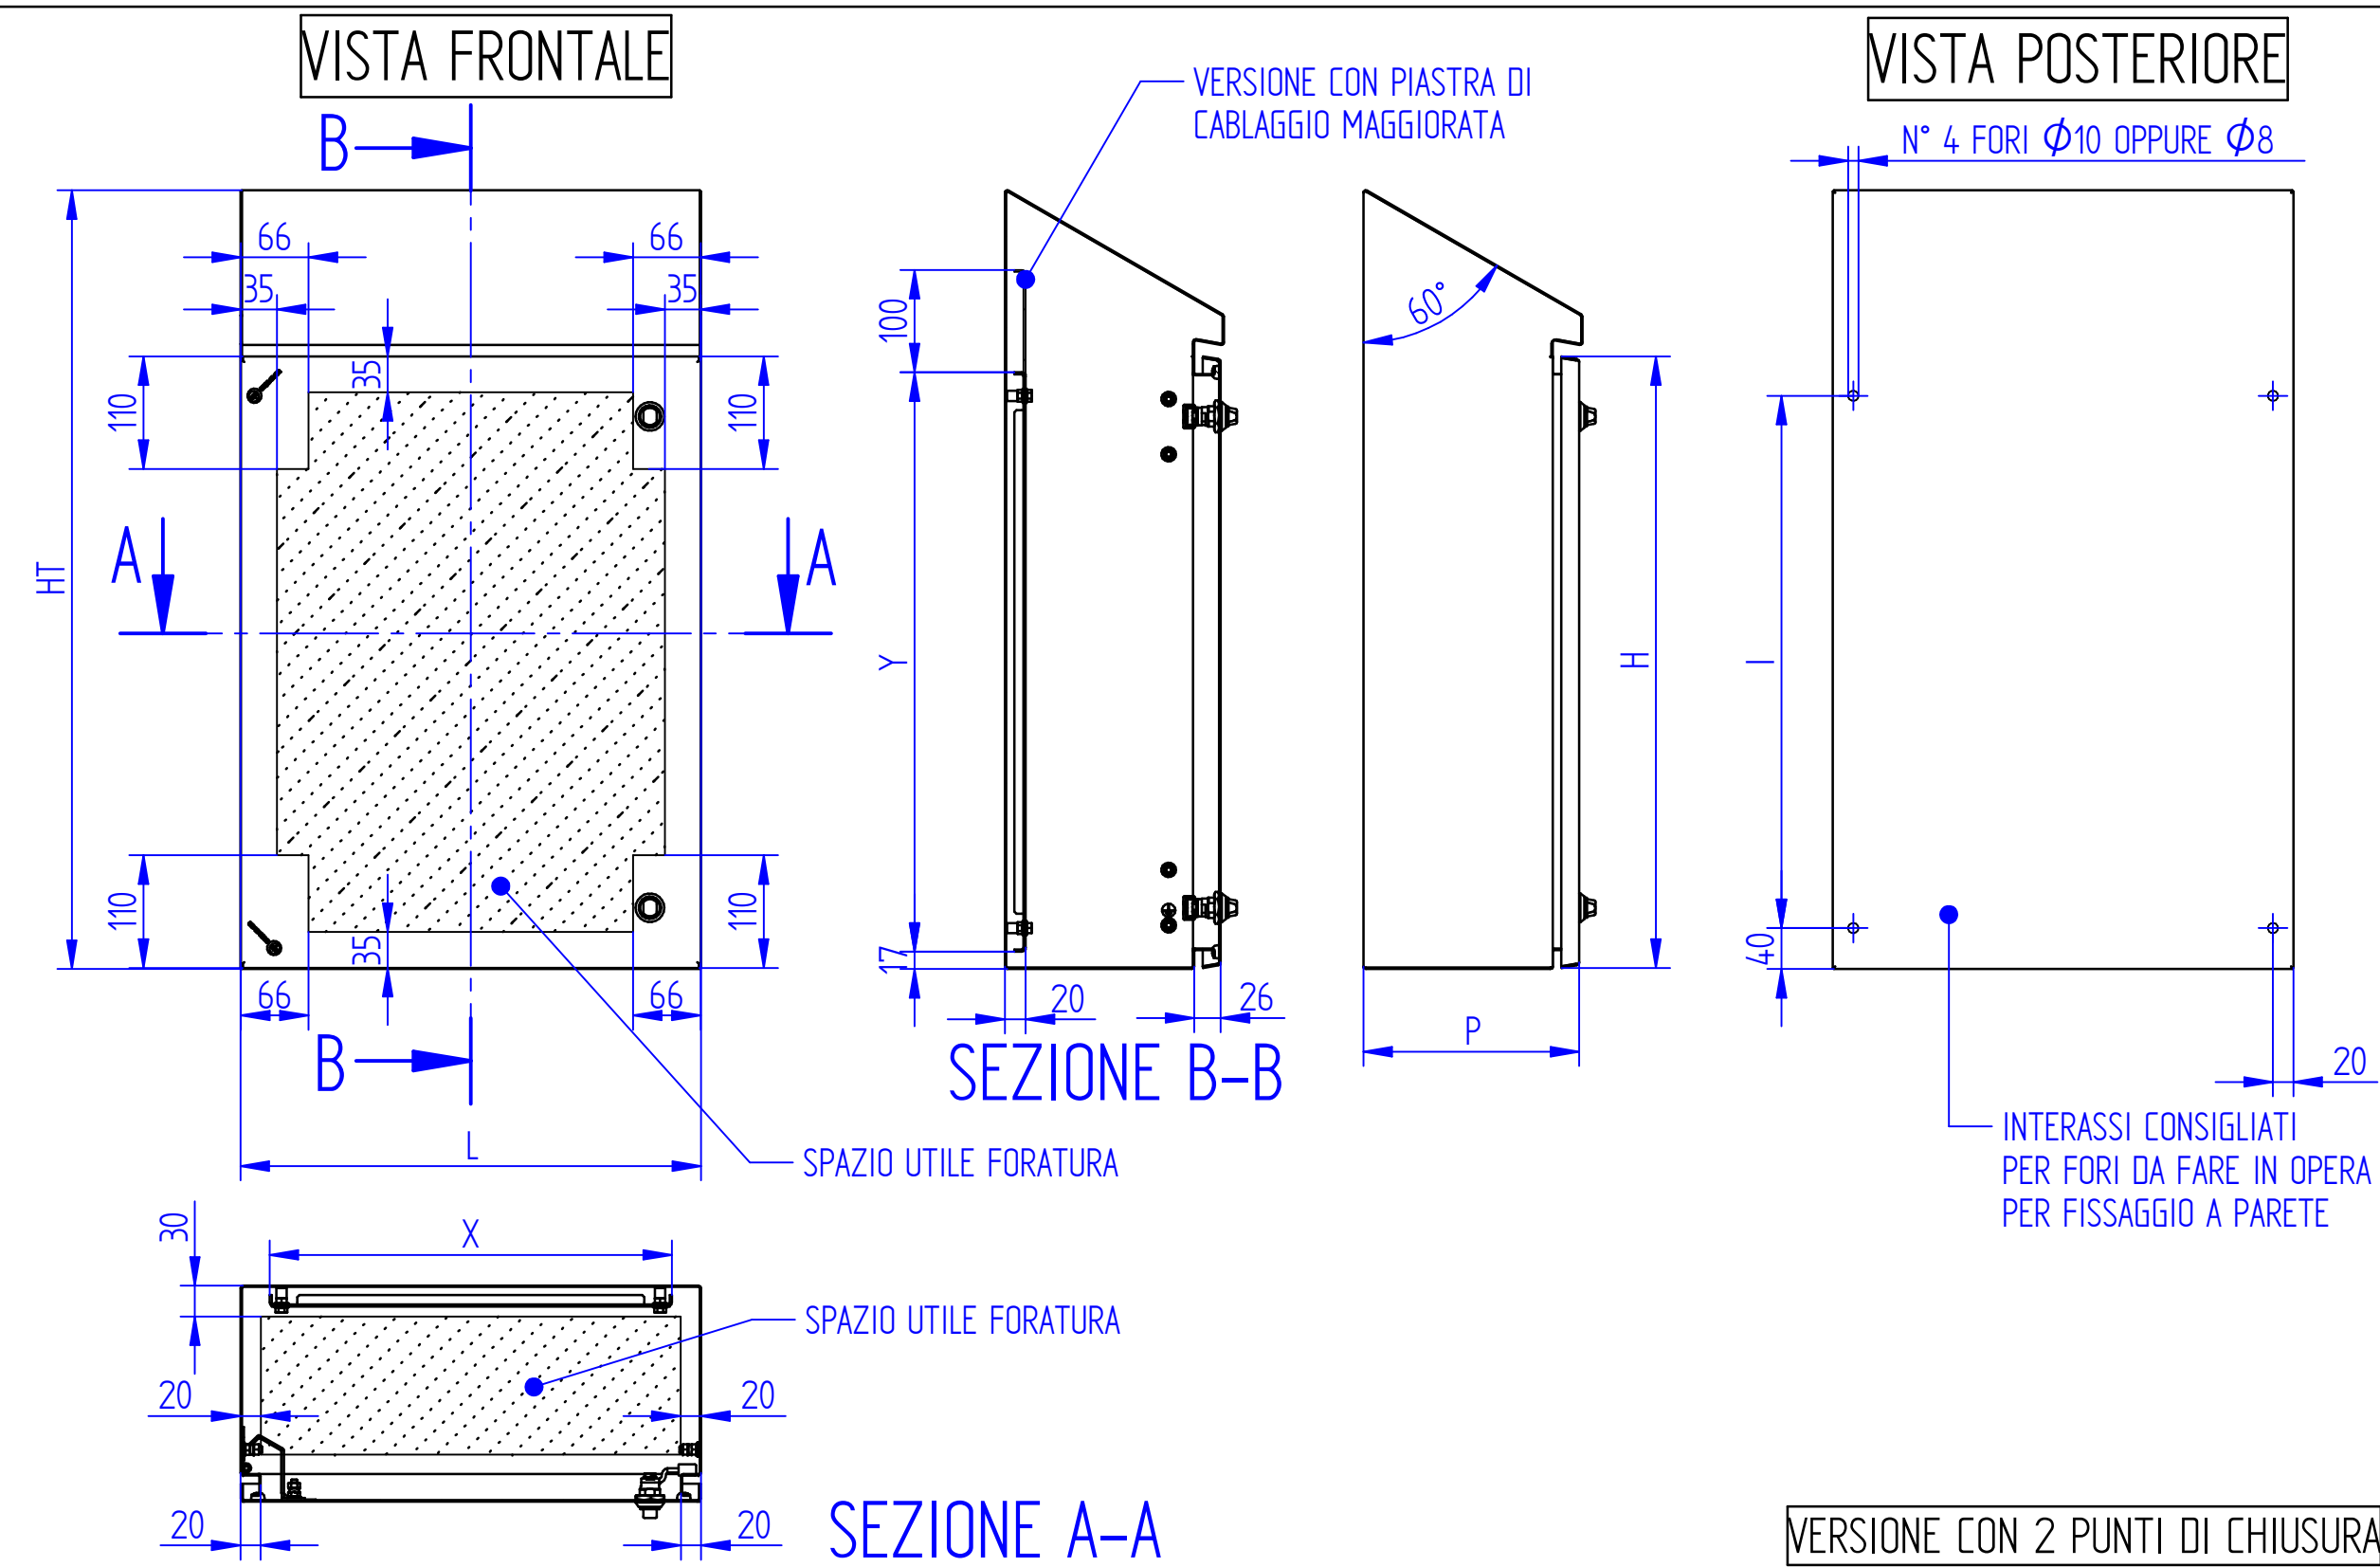

ARTICOLO	DIMENSIONI				PIASTRA DI CABLAGGIO		N° SERRATURE	N° CERNIERE	INTERASSE (I)	TUBOLARE + SOSTENO
	L	H	P	HT	X	Y				
CHD253021 (*)	250	300	210	460	193	266	1	2	220	NO
CHD383821 (*)	380	380	210	540	323	346	1	2	300	NO
CHD386021	380	600	210	760	323	566	2	2	520	NO
CHD454521	450	450	210	610	393	416	2	2	370	NO
CHD456021	450	600	210	760	393	566	2	2	520	NO
CHD606021	600	600	210	760	543	566	2	2	520	NO
CHD604525	600	450	250	634	566	393	2	2	370	NO
CHD606025	600	600	250	784	543	566	2	2	520	NO
CHD806030	800	600	300	810	743	566	2	3	520	SI
CHD808030	800	800	300	1010	743	766	2	3	720	SI
CHD8010030	800	1000	300	1210	743	966	2	3	920	SI
CHD8012030	800	1200	300	1410	743	1166	3	3	1120	SI

(*) VERSIONE CON PIASTRA DI CABLAGGIO SENZA PIEGHE LATERALI

POSIZIONE STANDARD DELLE CERNIERE SUL LATO SINISTRO
 - PORTA REVERSIBILE -

Descrizione
**SCHEMA GENERALE CASSE IGIENICHE
 MODELLO CHD**

Scheda Tecnica COD.
SCTEC.CHD.IT

Rev. 02
 Data 25/11/2024
 FOGLIO 1 DI 1

MP GAMMA
 WIPPA INDETERMINABILE