

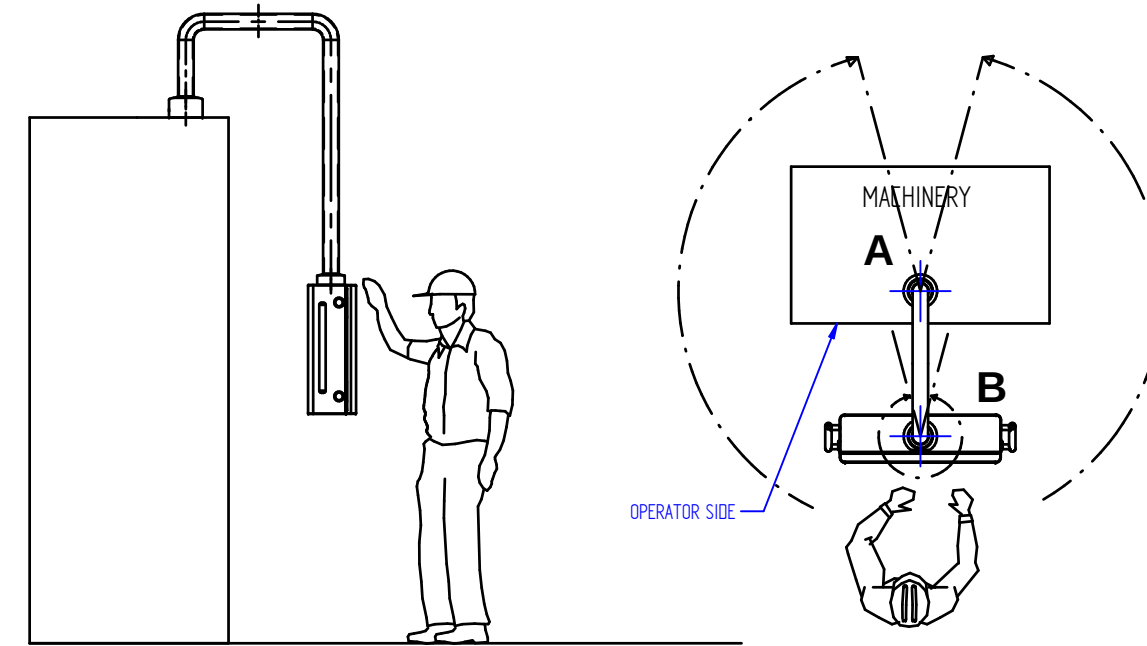
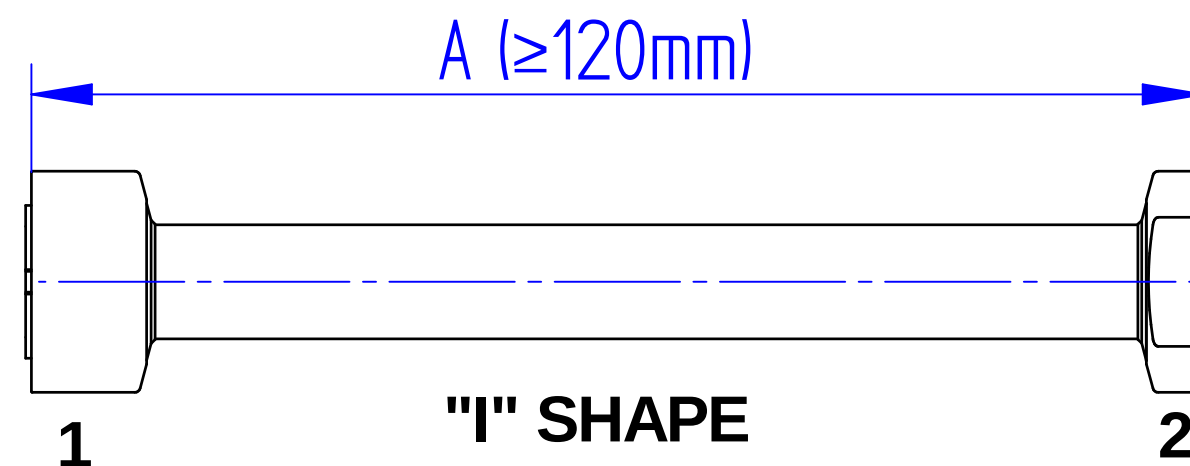
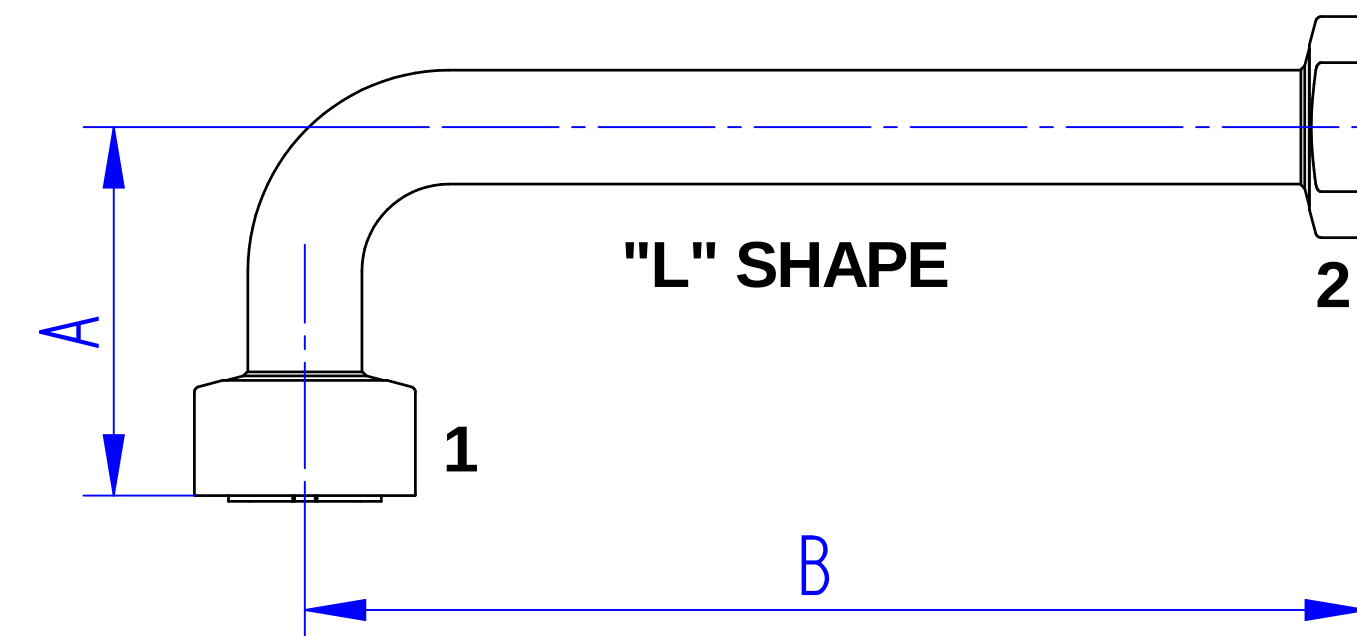
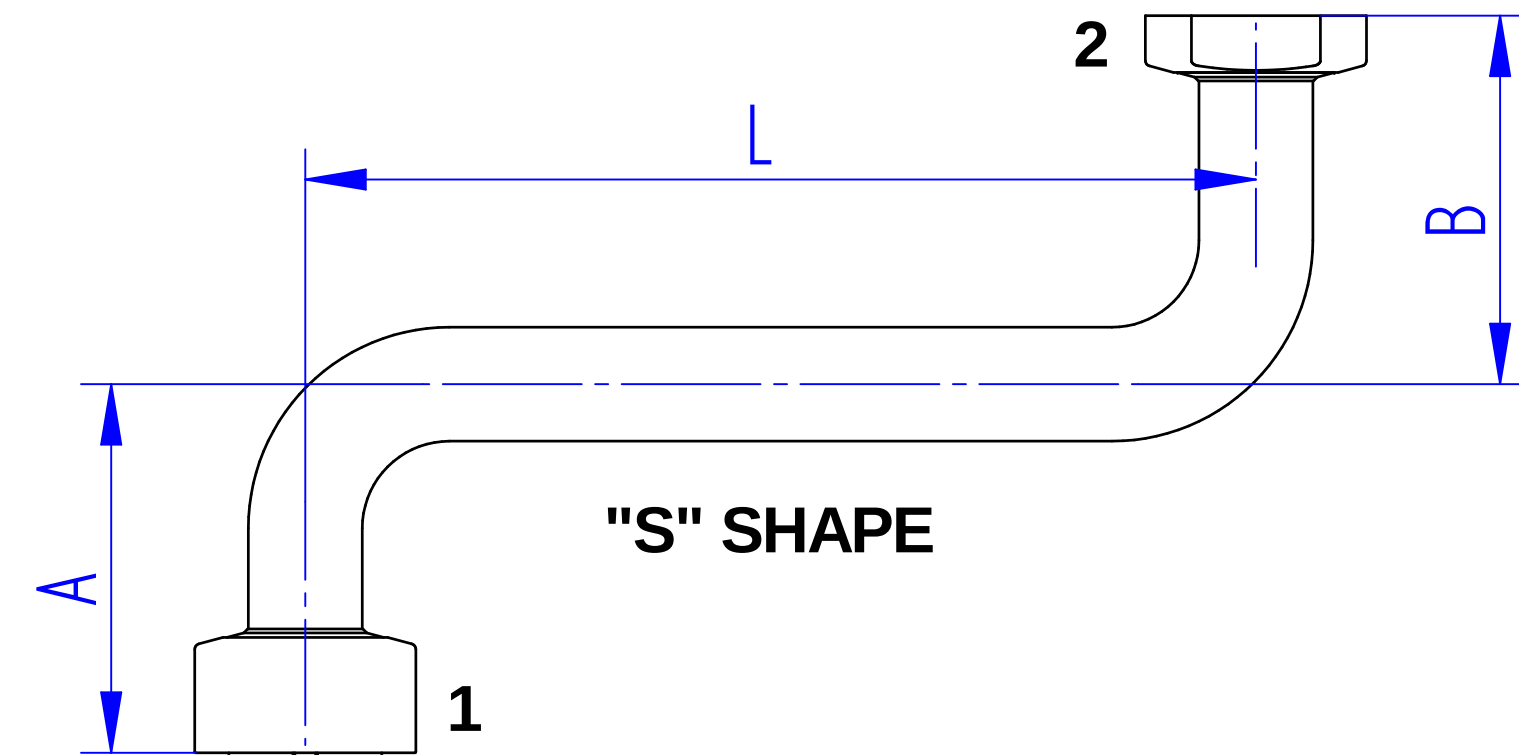
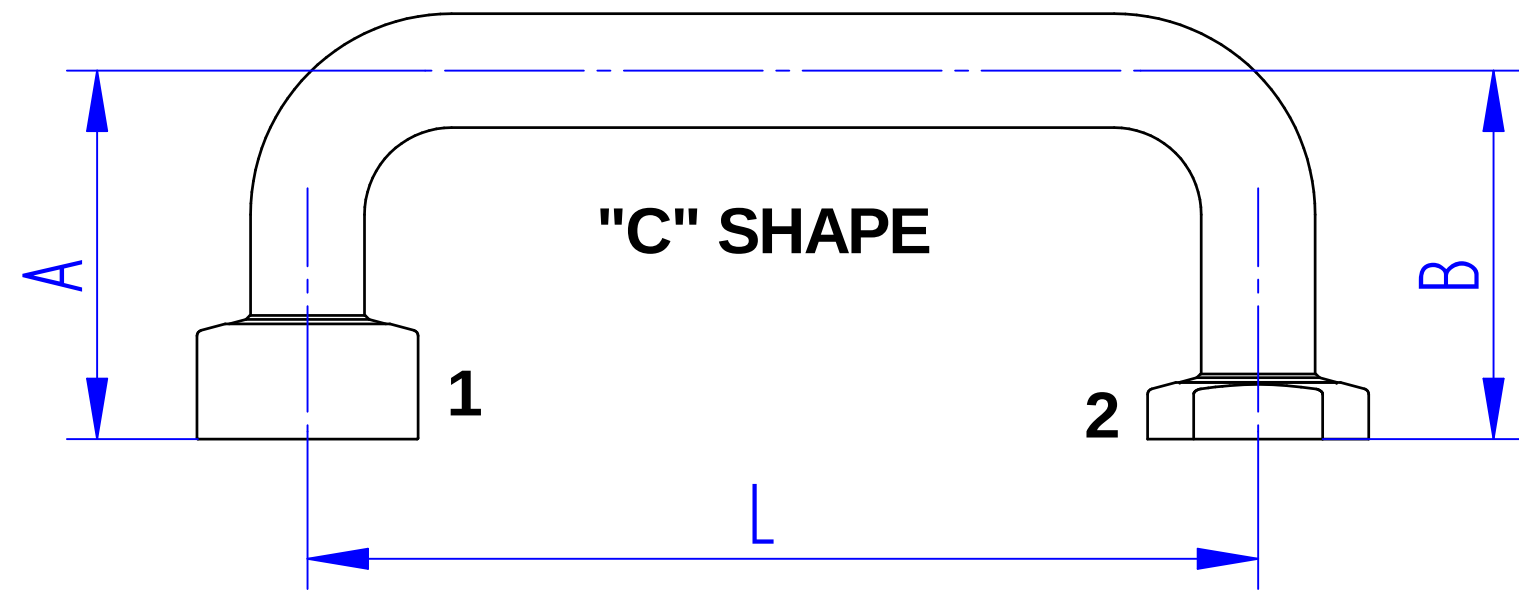


TOLLERANZE IN GRADO MEDIO COME DA NORMA: ISO2768-m

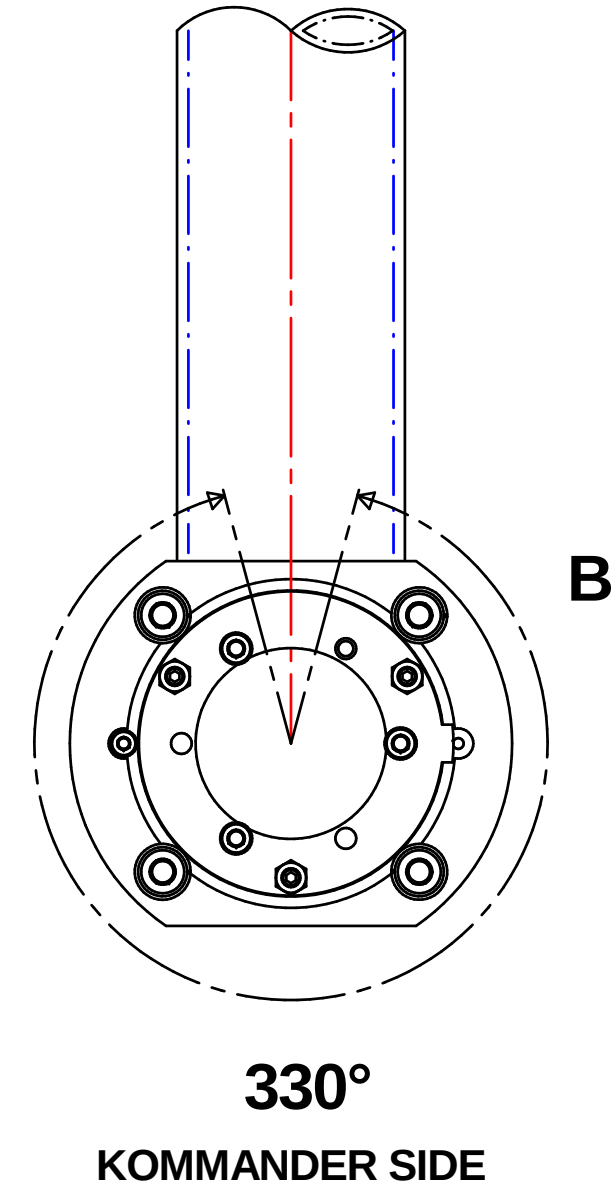

LOWER VIEW

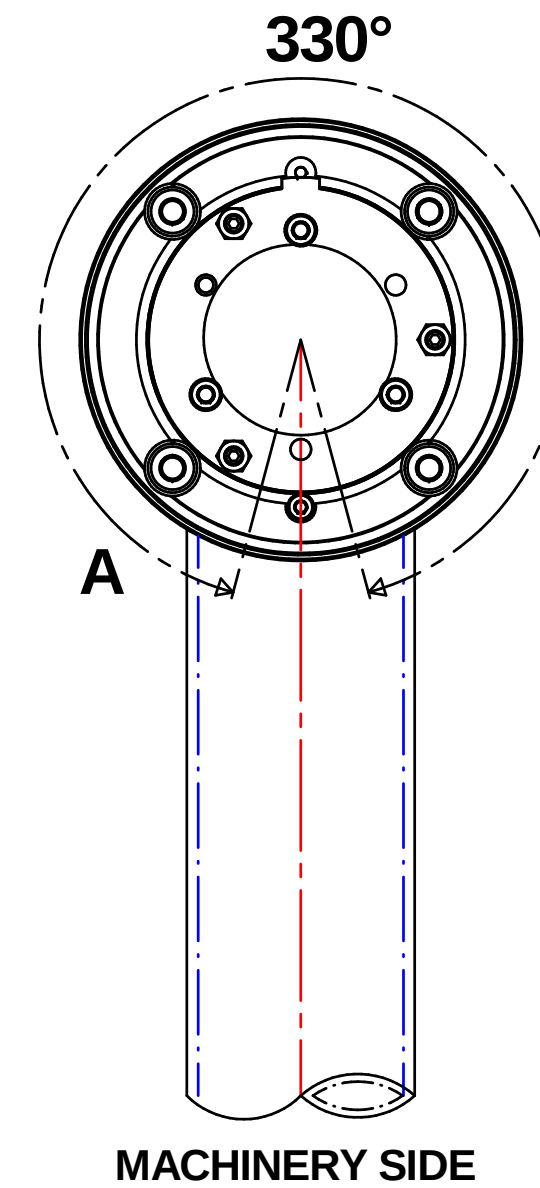

Y	ITEM CODE	
	4	PIPE DIAMETER Ø 48,3
	6	PIPE DIAMETER Ø 60,3
	C	PIPE SHAPE
	S	PIPE SHAPE
	L	PIPE SHAPE
	I	PIPE SHAPE
		SIDE "A" LENGHT - MIN. 200 x Ø48 - MIN. 250 x Ø60
		SIDE "L" LENGHT - MIN. 400
		SIDE "B" LENGHT - MIN. 200 x Ø48 - MIN. 250 x Ø60
	M	MACHINERY SIDE "1" JOINT TYPE - ROTATING BIG
	F	MACHINERY SIDE "1" JOINT TYPE - FIXED CHAMFERED
	X	NO "SIDE 1" JOINT
	S	KOMMANDER SIDE "2" JOINT TYPE - ROTATING CHAMFERED
	F	KOMMANDER SIDE "2" JOINT TYPE - FIXED CHAMFERED
	X	NO "SIDE 2" JOINT
	H	REINFORCEMENT ON MACHINERY SIDE

EX:

Y

4

C

0200 - 0400 - 0200

M

S

H