

DES-PDM KN

Cable entry plate


- large frame

- For up to 72 non-terminated cables
- High retaining force thanks to the double membrane
- Cost efficient solution
- High IP grade (IP65-66)

Model / Code	Cable nr. - Ø cables [mm]	Dimensions [mm]		Pcs / pack
		Cut-out	Plate	
DES-PDM-KN-72G_MPX	42 - 2.8 / 6.5 21 - 4.6 / 10.2 6 - 8.6 / 16.2 3 - 14.5 / 22	192 x 62	221 x 90	1
DES-PDM-KN-72B_MPX	42 - 2.8 / 6.5 21 - 4.6 / 10.2 6 - 8.6 / 16.2 3 - 14.5 / 22	192 x 62	221 x 90	1




Double membrane



The DES-PDM KN is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

Dimensions [mm]

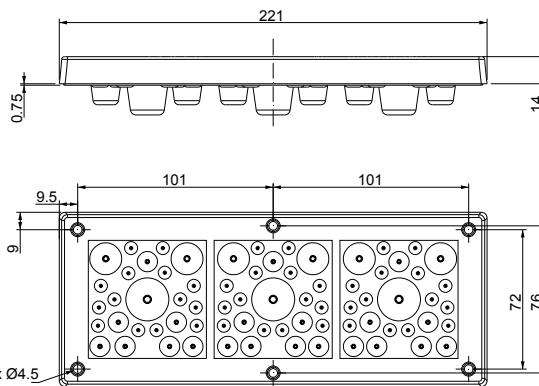

Technical data

Material: TPE

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +105°C (static)

Features: halogens and silicones free