

DES-PDM M

Round cable entry plates with internal frame and locknut


- ▶ For several number of non-terminated cables
- ▶ High retaining force thanks to the double membrane
- ▶ Cost efficient solution
- ▶ High IP grade (IP65-66-68)
- ▶ Metric sized



Model / Code	Cable nr. - Ø cables [mm]	Thread x1.5	Dimensions Ø P [mm]	Pcs / pack
DES-PDM-M32-4G_MPX	3 - 2.6 / 6.5 1 - 5.5 / 12.5	M32	46	10
DES-PDM-M32-4-2G_MPX	4 - 3.5 / 8.8			
DES-PDM-M32-7G_MPX	7 - 2.6 / 6.5			
DES-PDM-M40-8G_MPX	4 - 2.6 / 6.5 4 - 4 / 10.2	M40	54	10
DES-PDM-M50-8G_MPX	5 - 4.6 / 10.2 3 - 6.8 / 12.5	M50	64	10
DES-PDM-M50-10G_MPX	7 - 2.8 / 6.5 2 - 4.6 / 10.2 1 - 14.5 / 22			
DES-PDM-M50-12G_MPX	4 - 2.8 / 6.5 8 - 4.6 / 10.2			
DES-PDM-M50-19G_MPX	19 - 2.8 / 6.5			
DES-PDM-M63-9G_MPX	1 - 2.6 / 6 3 - 4.6 / 10.2 4 - 8.6 / 16.2 1 - 10.9 / 20	M63	77	10
DES-PDM-M63-13G_MPX	4 - 2.8 / 6 4 - 4.6 / 10.2 5 - 9.5 / 16.2			
DES-PDM-M63-14G_MPX	14 - 5 / 10			
DES-PDM-M63-35G_MPX	35 - 2.6 / 5.5			

The round metric DES-PDM M is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

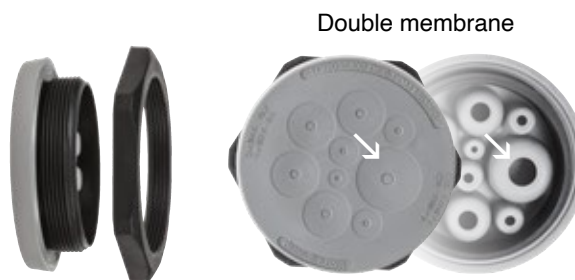

Technical data

Material: TPE

Flammability: self-extinguishing acc. to UL94-V0


Temperature: -40°C... +105°C (static)

Features: halogens and silicones free

Related products

Hydraulic punch driver HY360

Dimensions [mm]

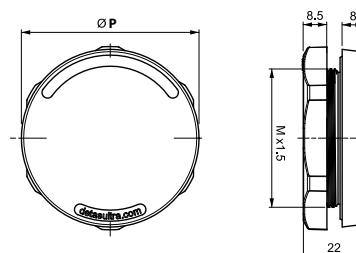

DES-PDM M

Round cable entry plates with internal frame and locknut

- ▶ For several number of non-terminated cables
- ▶ High retaining force thanks to the double membrane
- ▶ Cost efficient solution
- ▶ High IP grade (IP65-66-68)
- ▶ Metric sized



Model / Code	Cable nr. - Ø cables [mm]	Thread x1.5	Dimensions Ø P [mm]	Pcs / pack
DES-PDM-M32-4B_MPX	3 - 2.6 / 6.5 1 - 5.5 / 12.5	M32	46	10
DES-PDM-M32-4-2B_MPX	4 - 3.5 / 8.8			
DES-PDM-M32-7B_MPX	7 - 2.6 / 6.5			
DES-PDM-M40-8B_MPX	4 - 2.6 / 6.5 4 - 4 / 10.2	M40	54	10
DES-PDM-M50-8B_MPX	5 - 4.6 / 10.2 3 - 6.8 / 12.5	M50	64	10
DES-PDM-M50-10B_MPX	7 - 2.8 / 6.5 2 - 4.6 / 10.2 1 - 14.5 / 22			
DES-PDM-M50-12B_MPX	4 - 2.8 / 6.5 8 - 4.6 / 10.2			
DES-PDM-M50-19B_MPX	19 - 2.8 / 6.5			
DES-PDM-M63-9B_MPX	1 - 2.6 / 6 3 - 4.6 / 10.2 4 - 8.6 / 16.2 1 - 10.9 / 20	M63	77	10
DES-PDM-M63-13B_MPX	4 - 2.8 / 6 4 - 4.6 / 10.2 5 - 9.5 / 16.2			
DES-PDM-M63-14B_MPX	14 - 5 / 10			
DES-PDM-M63-35B_MPX	35 - 2.6 / 5.5			

The round metric DES-PDM M is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

Double membrane



Technical data

Material: TPE

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +105°C (static)

Features: halogens and silicones free

Related products

Hydraulic punch driver HY360

Dimensions [mm]

