

DES-PM 24

Cable entry plates for non-terminated cables

- ▶ For high number of cables
- ▶ High retaining force thanks to the double membrane
- ▶ Cost efficient solution
- ▶ High IP grade (IP65-66)




Model / Code	Cable nr. - Ø cables [mm]	Dimensions [mm]		Pcs / pack
		Cut-out	Plate	
DES-PM24-12G_MPX	12 - max. 15	112 x 36 max. +0.5	144 x 46	10
DES-PM24-14G_MPX	14 - max. 12.1			
DES-PM24-17G_MPX	5 - max. 10.5 12 - max. 12.6			
DES-PM24-18G_MPX	4 - max. 6.5 5 - max. 10.5 5 - max. 12.6 4 - max. 16.1			
DES-PM24-20G_MPX	13 - max. 6.5 7 - max. 12.1			
DES-PM24-26G_MPX	16 - max. 6.5 4 - max. 12.1 4 - max. 16.1 2 - cavo ASI			
DES-PM24-42G_MPX	1 - max. 4.7 12 - max. 5 17 - max. 6.4 12 - max. 7.2			
DES-PM24-48G_MPX	48 - max. 6.5			
DES-PM24-50G_MPX	33 - max. 5.3 9 - max. 6.4 8 - max. 8.3			

The DES-PM 24 is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

Double membrane

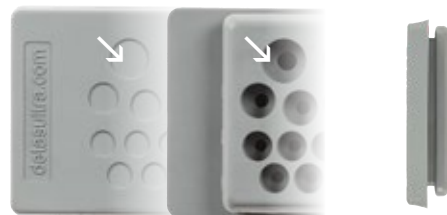

Technical data

Material: TPE

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +105°C (static)


Features: halogens and silicones free

Wall thickness: from 1.5 to 2.5 mm

Related products

Hydraulic punch driver HY360

Dimensions [mm]

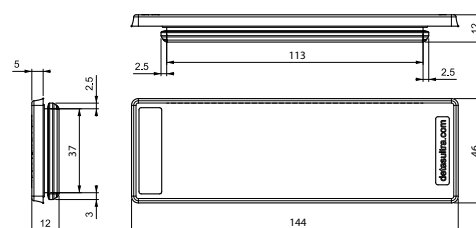

DES-PM 24

Cable entry plates for non-terminated cables

- ▶ For high number of cables
- ▶ High retaining force thanks to the double membrane
- ▶ Cost efficient solution
- ▶ High IP grade (IP65-66)



Model / Code	Cable nr. - Ø cables [mm]	Dimensions [mm]		Pcs / pack
		Cut-out	Plate	
DES-PM24-12B_MPX	12 - max. 15	112 x 36 max. +0.5	144 x 46	10
DES-PM24-14B_MPX	14 - max. 12.1			
DES-PM24-17B_MPX	5 - max. 10.5 12 - max. 12.6			
DES-PM24-18B_MPX	4 - max. 6.5 5 - max. 10.5 5 - max. 12.6 4 - max. 16.1			
DES-PM24-20B_MPX	13 - max. 6.5 7 - max. 12.1			
DES-PM24-26B_MPX	16 - max. 6.5 4 - max. 12.1 4 - max. 16.1 2 - cavo ASI			
DES-PM24-42B_MPX	1 - max. 4.7 12 - max. 5 17 - max. 6.4 12 - max. 7.2			
DES-PM24-48B_MPX	48 - max. 6.5			
DES-PM24-50B_MPX	33 - max. 5.3 9 - max. 6.4 8 - max. 8.3			

The DES-PM 24 is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

Double membrane



Technical data

Material: TPE

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +105°C (static)

Features: halogens and silicones free

Wall thickness: from 1.5 to 2.5 mm

Related products

Hydraulic punch driver HY360

Dimensions [mm]

