

DES-PM M

Round cable entry plates for non-terminated cables

- ▶ For several number of cables
- ▶ High retaining force thanks to the double membrane
- ▶ Cost efficient solution
- ▶ High IP grade (IP65-66)
- ▶ Metric sized



The round metric DES-PM M is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

Technical data

Material: TPE

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +105°C (static)

Features: halogens and silicones free

Type 1: wall thickness from 1.5 to 2.5 mm


Type 2: wall thickness from 2.8 to 4 mm

Related products

Hydraulic punch driver HY360

Model / Code	Cable nr. - Ø cables [mm]	Dimensions [mm]		Pcs / pack
		Ø Cut-out	Ø Plate	
DES-PM-M25-4G-T1_MPX	4 - max. 8	min.: 25 max.: 26 conigl.: 25.5	34	10
DES-PM-M25-6G-T1_MPX	4 - max. 5.2 2 - max. 9.4			
DES-PM-M32-10G-T1_MPX DES-PM-M32-10G-T2_MPX	6 - max. 5.2 2 - max. 6.4 2 - max. 9.4	min.: 32 max.: 33 conigl.: 32.5	40	10
DES-PM-M50-9G-T1_MPX	5 - max. 7 4 - max. 18.3			
DES-PM-M50-11G-T1_MPX	7 - max. 7 3 - max. 11.4 1 - max. 22			
DES-PM-M50-12G-T1_MPX DES-PM-M50-12G-T2_MPX	10 - max. 9 2 - max. 11.4			
DES-PM-M50-15G-T1_MPX	2 - max. 6 4 - max. 7.2 4 - max. 9.7 5 - max. 12	min.: 50 max.: 51 conigl.: 50.5	62	10
DES-PM-M50-17G-T1_MPX	5 - max. 5.5 5 - max. 6.5 3 - max. 9.7 4 - max. 11.4			
DES-PM-M50-20G-T1_MPX	16 - max. 6.5 4 - max. 9.7			


Double membrane



Type 1 Type 2



Dimensions [mm]



DES-PM M

Round cable entry plates for non-terminated cables


- ▶ For several number of cables
- ▶ High retaining force thanks to the double membrane
- ▶ Cost efficient solution
- ▶ High IP grade (IP65-66)
- ▶ Metric sized



Model / Code	Cable nr. - Ø cables [mm]	Dimensions [mm]		Pcs / pack
		Ø Cut-out	Ø Plate	
DES-PM-M25-4B-T1_MPX	4 - max. 8	min.: 25 max.: 26 consigl.: 25.5	34	10
DES-PM-M25-6B-T1_MPX	4 - max. 5.2 2 - max. 9.4			
DES-PM-M32-10B-T1_MPX DES-PM-M32-10B-T2_MPX	6 - max. 5.2 2 - max. 6.4 2 - max. 9.4	min.: 32 max.: 33 consigl.: 32.5	40	10
DES-PM-M50-9B-T1_MPX	5 - max. 7 4 - max. 18.3			
DES-PM-M50-11B-T1_MPX	7 - max. 7 3 - max. 11.4 1 - max. 22			
DES-PM-M50-12B-T1_MPX DES-PM-M50-12B-T2_MPX	10 - max. 9 2 - max. 11.4			
DES-PM-M50-15B-T1_MPX	2 - max. 6 4 - max. 7.2 4 - max. 9.7 5 - max. 12	min.: 50 max.: 51 consigl.: 50.5	62	10
DES-PM-M50-17B-T1_MPX	5 - max. 5.5 5 - max. 6.5 3 - max. 9.7 4 - max. 11.4			
DES-PM-M50-20B-T1_MPX	16 - max. 6.5 4 - max. 9.7			

The round metric DES-PM M is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

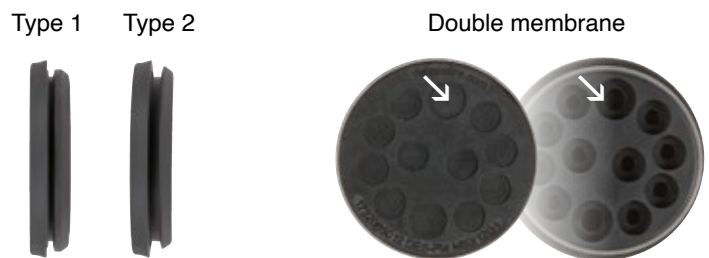

Technical data

Material: TPE

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +105°C (static)

Features: halogens and silicones free

Type 1: wall thickness from 1.5 to 2.5 mm

Type 2: wall thickness from 2.8 to 4 mm

Related products

Hydraulic punch driver HY360

Dimensions [mm]

