


## SKINTOP® INOX / SKINTOP® INOX-R

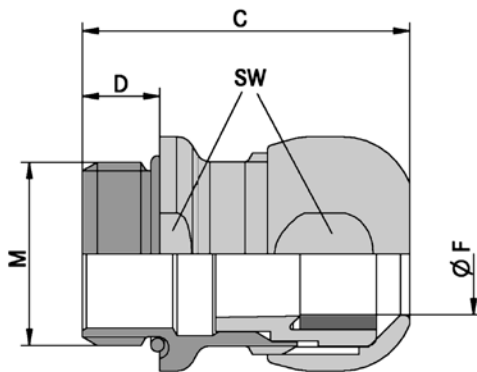

### INFO

- Stainless steel version with compact design
- For use in the splash zone in the food production

### Benefits

- Corrosion-resistant
- Sea water-resistant
- Smooth surfaces - no edges
- Compact design
- Wide, variable clamping ranges

### Application range

- Onshore and offshore applications
- Bottling plants and breweries
- Food industry (product-free zone, splash zone)

### Norm references / Approvals

- ECOLAB®  
Industry standard in the field of professional cleaning and disinfection in the food and beverage industry
- DIN EN 1672-2  
Guideline for the design of machinery
- DIN EN ISO 14159  
Security of machinery Hygienic requirements for the design of machinery
- NSF/ANSI 169  
Hygienic design for machinery and components

### Product Make-up

- Metric connection thread acc. to DIN EN 60423
- Basis for technical information DIN IEC 62444

### Technical data

	<b>Classification ETIM 5/6</b> ETIM 5.0/6.0 Class-ID: EC000441 ETIM 5.0/6.0 Class-Description: Cable screw gland
	<b>Material</b> Body: stainless steelV4A (1.4404 / 316L) Insert: polyamide Sealing: silicone O-Ring: silicone
	<b>Protection rating</b> IP 68 - 10 bar (M12 - M20) IP 68 - 5 bar (M25 - M50) IP 69 NEMA Type 1, 2, 4x, 6, 12
	<b>Temperature range</b> -40°C to +100°C

Article number	Article designation / size	Ø F mm	SW wrench size mm	Overall length C mm	Thread length D mm	Pieces / PU
<b>SKINTOP® INOX</b>						
SKIN-INOX-M12_MPX	M 12 x 1,5	4-7	16	29.3	6.5	5
SKIN-INOX-M16_MPX	M 16 x 1,5	6-10	20	32.4	7	5
SKIN-INOX-M20_MPX	M 20 x 1,5	7-13	24	35.5	8	5
SKIN-INOX-M25_MPX	M 25 x 1,5	9-17	29	39.2	8	5
SKIN-INOX-M32_MPX	M 32 x 1,5	11-21	36	44.6	9	5
SKIN-INOX-M40_MPX	M 40 x 1,5	19-28	45	51.2	9	5
SKIN-INOX-M50_MPX	M 50 x 1,5	27-35	54	56.2	10	5
<b>SKINTOP® INOX-R</b>						
SKIN-INOX-R-M12_MPX	M 12 x 1,5	3-5	16	29.3	6.5	5
SKIN-INOX-R-M16_MPX	M 16 x 1,5	5-7	20	32.4	7	5
SKIN-INOX-R-M20_MPX	M 20 x 1,5	6-10	24	35.5	8	5
SKIN-INOX-R-M25_MPX	M 25 x 1,5	7-13	29	39.2	8	5
SKIN-INOX-R-M32_MPX	M 32 x 1,5	8-15	36	44.6	9	5
SKIN-INOX-R-M40_MPX	M 40 x 1,5	15-23	45	51.2	9	5
SKIN-INOX-R-M50_MPX	M 50 x 1,5	22-29	54	56.2	10	5

Photographs and graphics are not to scale and do not represent detailed images of the respective products.